Gravel / Grass Grid System

PROPERTIES	CHARACTERISTICS	REF
	OCity NGR65	
Material	Polyethylene PE	
Mass per unit	8 kg per SQM	ISO 845
Length	500 mm	
Width	500 mm	
Good Coverage	0.25 SQM per grid	ISO 1923
Grid Thickness	65 mm	
Wall Thickness	6 mm	
Grid weight	approx. 2 kg per grid	
	approx 8 kg per SQM	
Colour	Black	
Anchoring	4 interlocking points per side	
Fill Material	4 - 14mm Angular gravel	
	Rootzone soil mix / hard wearing grass seed	
Chemical Properties	High resistance to water, most acids, bases and salt solutions	
UV Resistance	Anti UV treatment	


MECHANICAL PROPERTIES		
Compression Resistance*	up to 800 tonnes per SQM	ISO 844
Applications**	Areas for pedestrians, cyclist and motorcyclists	
	Light vehicle driveways (up to 7.5 ton HGV)	ISO 124
	Light vehicle parking areas (up to 7.5 ton HGV)	


^{*}Variation subject to nature of the infill material





^{**}The values indicated on this technical data sheet serve may be used as guidelines for product use. They should be considered neither a specification limits, nor as guarantees. In addition, product application, use and/or processing are beyond our control and consequently, they remain the responsibility of the user and/or the transformer.


DIMENSIONAL DIAGRAMS

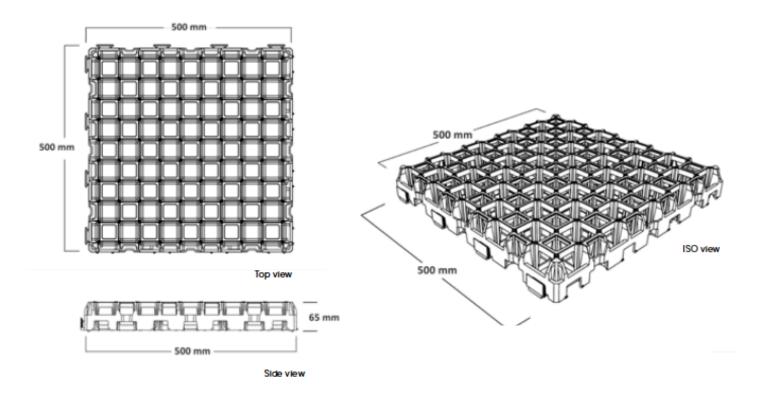









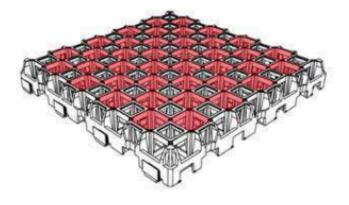






45° herringbone marking



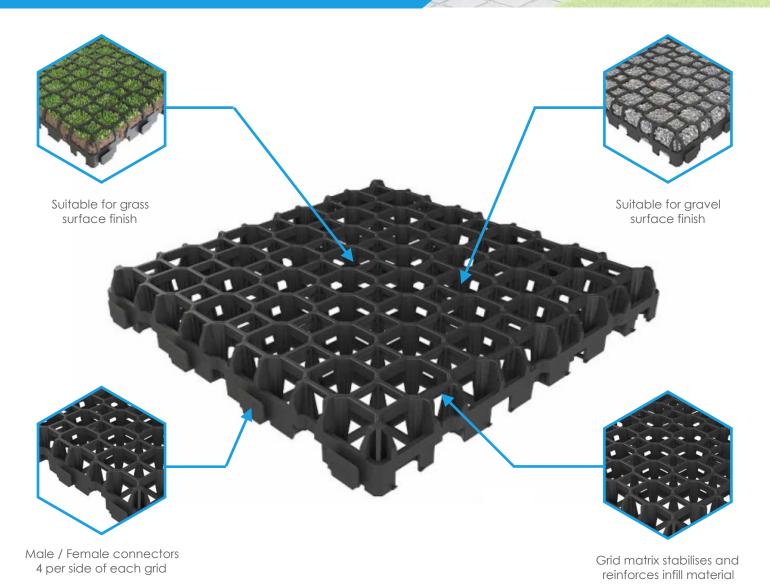



	OCity NGR65
QTY per pallet	140 Grids (max.)
SQM per pallet	35 SQM (max.)
Pallet Weight	295 kg (approx.)
Pallet Height	2200 mm
Pallet Length	1200 mm
Pallet Width	1000 mm
Pallet Material	Wooden (non-returnable)
Packaging	Shrink Wrapped & Banded
Pallet Unloading	Tail Lift / Manual Pallet Truck



www.nidagraveluk.co.uk